
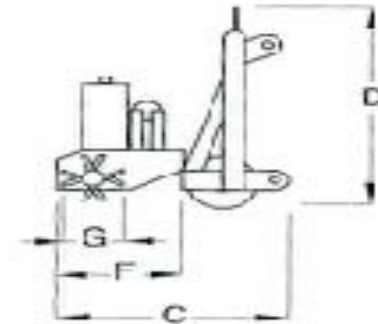


BUTLER EQUIPMENT

FPF In-and-Out Tiller

BASE MACHINE: Tiller head with hydraulic sensor retraction and hydraulic tilt (2 hydraulic quick couplers required); manual emergency recall lever; 1100mm splined PTO powers head; double support power lift; designed for work in rows 9.1 to 14.6 feet (2.8 to 4.5 meters) wide; interchangeable harrow head and disk kit available on request; tiller head slides in-and-out between plants; PTO included, not warranted.

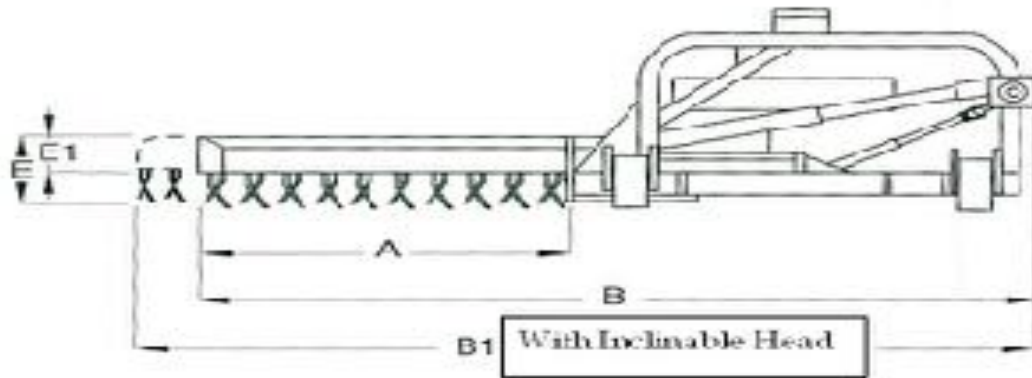

<u>FPF MODEL</u>	<u>MIN. HP TRACTOR</u>	<u>WORKING WIDTH (A)</u>	<u>OVERALL WIDTH (B)</u>	<u>INCLINED WIDTH (B1)</u>	<u>LENGTH (C)</u>	<u>HEIGHT (D)</u>	<u>NUMBER BLADES</u>	<u>NUMBER DISKS</u>	<u>TILLER HEAD HEIGHT (E)</u>	<u>ROTOR & TINES DIAMTR. (G)</u>
FPF 50-MF	20	20	76	80	57	43	16	N.A.	11	9
FPF 60-MF	20	23	80	84	57	43	20	N.A.	11	9
FPF 55	35	21	78	82	57	43	16	4	14	12
FPF 67	40	26	83	87	57	43	20	5	14	12
FPF 80	40	31	87	91	57	43	24	6	14	12
FPF 92	45	36	92	96	57	43	28	7	14	12
FPF 104	50	41	97	101	57	43	32	N.A.	14	12
FPF 116	55	45	101	105	57	43	36	N.A.	14	12

(ALL MEASUREMENTS IN INCHES)